




# MOTION 5

Posizionatore a 5 assi interpolati.  
Interpolated 5-axis positioner.  
Вращатель с 5 интерполированных осей  
Positionneur 5 axes interpolés.  
Interpolierter 5-Achsen Drehpositioniertisch.  
Posicionador de cinco ejes interpolados

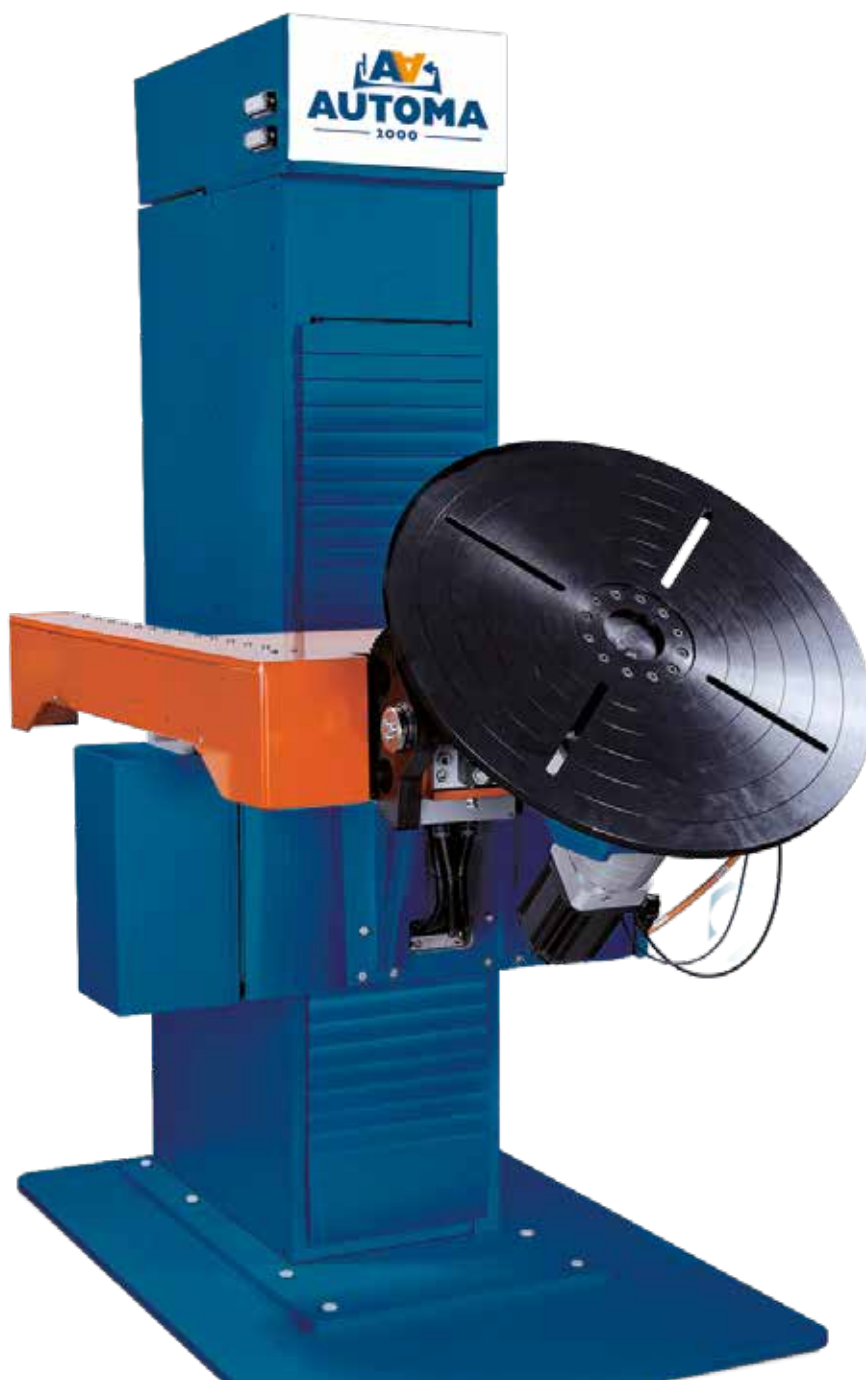

# MOTION 5

MOTION 5



DESCRIZIONE	DESCRIPTION	BESCHREIBUNG
asse X: corsa 300 mm	X axis: 300 mm stroke	Achse X : Hub 300mm
asse Z: corsa 800 mm	Z axis: 800 mm stroke	Achse Z : Hub 800 mm
asse Y: corsa 600 mm	Y axis: 600 mm stroke	Achse Y : Hub 600 mm
asse B: rotazione 360°	B axis: 360° rotation	Achse B : Drehbar 360°
asse A: bascula 0°/90°	A axis: 0° / 90° toggle	Achse A : Hub Schwingarm 0° / 90°
sottosquadro ed extra corsa: 10°	Undercut and excess travel 10°	Überlauf und Hinterschneiden 10°
velocità rotazione tavola: 12 giri / 1' max	Table rotation speed: 12 rev / Max 1'	Höchste Dreh Geschwindigkeit Drehtisch
velocità assi lineari: 9 giri / 1' max	Linear axis speed: 9 rev / Max 1'	Linear Achsen Geschwindigkeit 9 drehungen /1' max
diametro tavola: 800 mm	Table diameter: 800 mm	Durchmesser Drehtisch 800 mm
accesso: 3 lati	Access: 3 sides	Zugang : auf drei Seiten
portata: 1000 kg	Capacity: 1000 kg	Tragkraft : kg. 1000
alimentazione: 380V 32A	Power: 380V 32A	Stromversorgung : 380 V 32 A

